



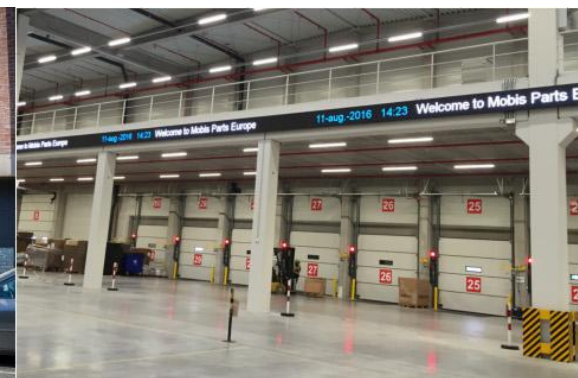

UniBanner EX2.5

- 5500nit brightness, 24/7 working no fear of direct sunlight
- IP65 waterproof, get ready for harsh environment
- Direct wall mount installation, save time and structure costs
- Smart phone APP control, real-time content update
- Customizable display size following the store environment

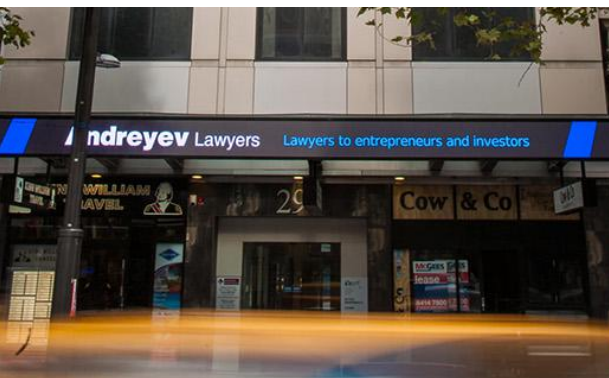

Technical Specifications

Pixel Pitch	2.5mm
Pixel Configuration	SMD1415
Brightness	5500nit
LED Module Size WxH	320x160mm
Typical LED Cabinet Size WxHxD	1280x320x100mm
Typical Cabinet Resolution	512x128
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	2.5-8m
Cabinet Material	Aluminum
Cabinet Weight	18kg
Protection grade	IP65
Color Temperature	2000-9500K Adjustable
Grey Scale	14bit
Contrast Ratio	3000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Power Consumption	Max 320W, Typical 96W
Storage Temperature / Humidity	-30~+60℃, 10~95%RH
Operating Temperature / Humidity	-20~+50℃, 10~90%RH
Maintenance	Front open service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair