



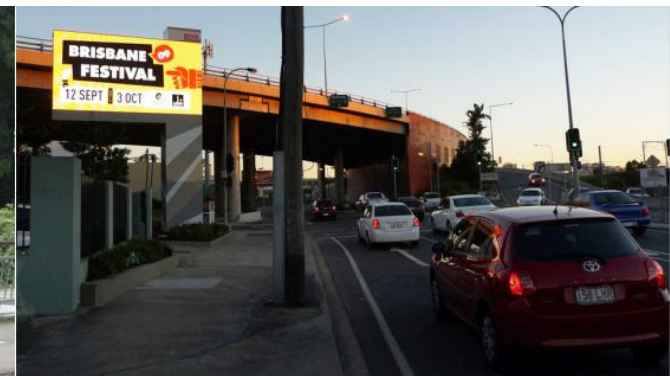

UniDisplay EX3.3

- 6000nit brightness, 24/7 non-stop working day and night
- Full pixel pitch options for different budget
- Curved, right angled, multiple sizes cabinet customizable
- IP65 waterproof, get ready for harsh environment

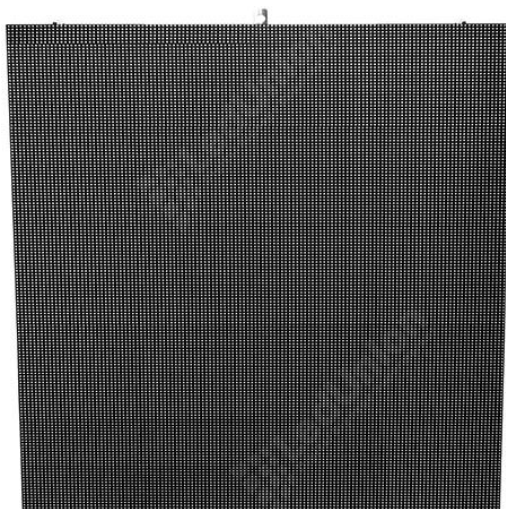

Technical Specifications

Pixel Pitch	3.3mm
Pixel Configuration	SMD1921
Brightness	6000nit
LED Module Size WxH	320x160mm
Typical LED Cabinet Size WxHxD	960x960x150mm (customizable)
Typical Cabinet Resolution	288x288
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Recommended Viewing Distance	3-10m
Cabinet Material	Steel or Aluminum
Cabinet Weight	42kg or 37kg
Protection grade	IP65
Color Temperature	2000-9500K Adjustable
Grey Scale	14bit
Contrast Ratio	3000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920 / 3840Hz
Power Consumption	Max 690W, Typical 210W
Storage Temperature / Humidity	-30~+60°C, 10~95%RH
Operating Temperature / Humidity	-30~+60°C, 10~95%RH
Maintenance	Rear Service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair