




UniModule EX2.5

- 6000nit brightness, 24/7 working in day and night
- 2.5~10mm pixel pitch for option
- Right angled, arc shaped module and cabinet available
- Front or rear serviceable for different buildings
- 5 years lifespan

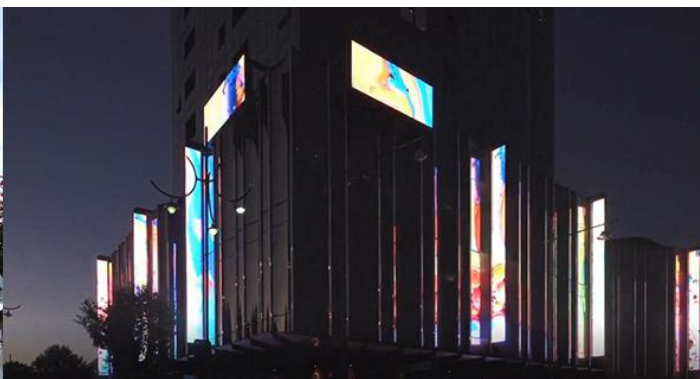

Technical Specifications

Pixel Pitch	2.5mm
Pixel Configuration	SMD1415
Pixel Density	160,000pix/sqm
Brightness	6000nit
LED Module Size WxHxD	320x160x16mm
LED Module Resolution	128x64
Driving Type	1/16
Weight	530g
Horizontal Viewing Angle	+/-70°
Vertical Viewing Angle	+/-70°
Viewing Distance	2.5-8m
Protection grade	IP62
Color Temperature	3000-9500K Adjustable
Grey Scale	14bit
Contrast Ratio	3000:1
Video Frame Rate	50/60Hz
Refresh Rate	1920Hz
Storage Temperature / Humidity	-30~+70℃, 10~95%RH
Operating Temperature / Humidity	-30~+60℃, 10~95%RH
Maintenance	Rear service
Input Voltage	100-240V AC
Input Signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video
Brightness Control	Manual / Automatic
LED Lifetime	>100,000 Hours
Service	Design, Configuration, Installation, Local repair